




NOTE: DRAWING USED FOR BAFFLE CONFIGURATION ONLY.
INLETS AND FLOW DIRECTION NOT INDICATED.

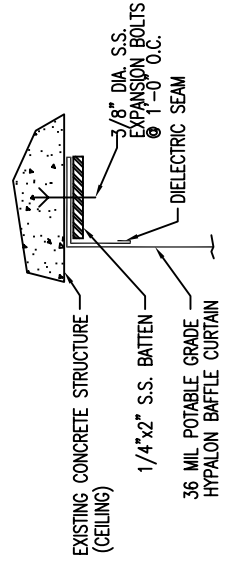


SECTION E-E

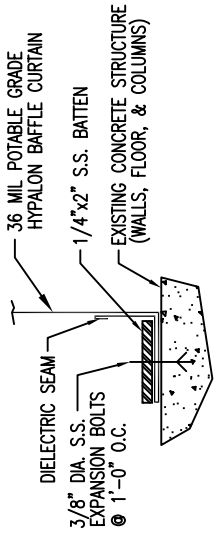


BAFFLE ANCHORING DETAIL A

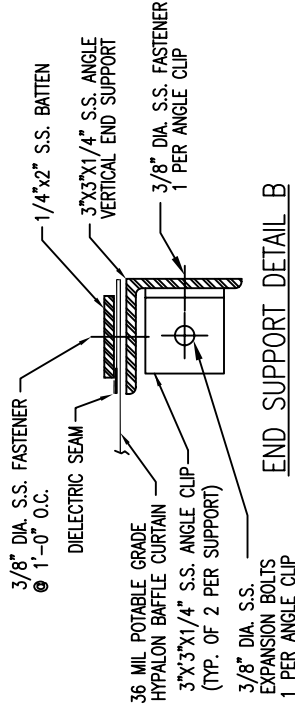

END SUPPORT DETAIL B

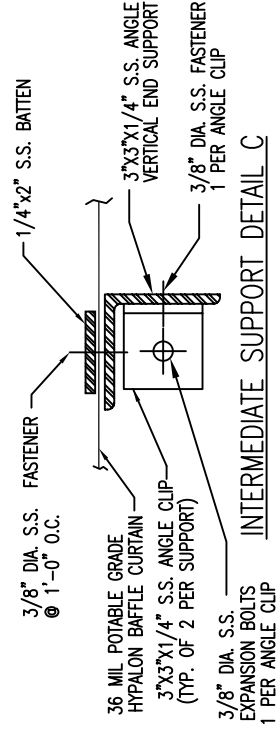

INTERMEDIATE SUPPORT DETAIL C

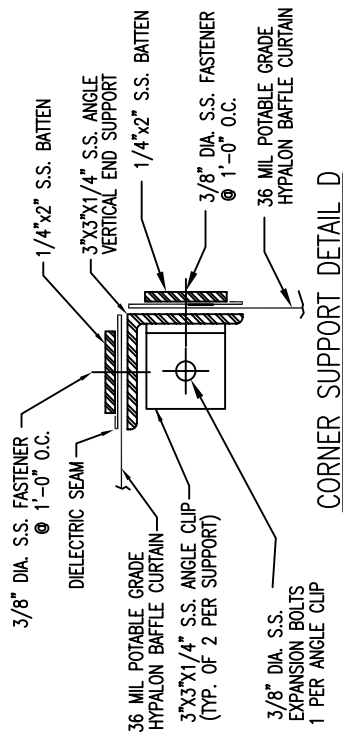

CORNER SUPPORT DETAIL D

| DATE | LET. | REVISION | DR. |
|------|------|----------|-----|
| | | | |
| | | | |
| | | | |
| | | | |

H.L.W./B.H.F./E.T./TYPICAL

CLEARWELL BAFFLES
TYPICAL

DLM PLASTICS CORP.
FINDLAY, OHIO

UNLESS OTHERWISE NOTED, ALLOWABLE VARIATIONS ARE:
 SIZE: PER ANSI Y32.1
 DIMENSIONS: ± 0.005, ± 0.008, ± 0.015, ± 0.030, ± 0.063, ± 0.125, ± 0.250, ± 0.500, ± 1.000
 NONE
 DATE: APPROVED BY: JEM
 01-30-93

4203-BAF

This print is the property of DLM PLASTICS CORP. and is loaned to you for your use only. It must not be copied or submitted to outside parties for use or examination.